

Product Lineup



10HP / 15HP / 25HP

- * New Design
- * The Louvers of Box Swing Electrically
- * Uniform and Moderate Air Output



5HP / 10HP / 15HP / 25HP / 30HP / 36HP

- * Large Air Flow
- * Multi-Direction for the Wind
- * Cool for Large Areas



10HP / 15HP / 25HP

- * Ducted Air Conditioner System
- * Uniform and Quiet Cooling Performance



10HP

- * Mobile Air Conditioner
- * Ultra-Cool Outlet Air Cooling temperature



5HP / 7.5HP / 10HP

- * Military Tent Cooling
- * Film Shooting Cooling



5HP / 7.5HP / 10HP

- * All in One Structure
- * Spot Cooling
- * With Low Noise


AP.ZBD Series



Technical Parameters

Model	Operating Voltage	Power Input (KW)	Cooling Capacity		Heating Capacity (KW)	Cooling Area (m ²)	Air Volume (CFM)	Refrigerant	Unit Dimension (D*W*H)	Plenum Chamber Box (D*W*H)	Weight (KG)
			KW	BTU							
15HP	220V~440V / 3N / 50Hz / 60Hz	12	43.5	180,000	52.2	135~165	3,975	R410a Eco-friendly	2.0m*1.1m*1.9m	1.0m*1.1m*1.4m	650
25HP		20	72.5	300,000	87	225~275	6,625		2.5m*1.1m*2.1m	1.2m*1.1m*1.4m	850
30HP		24	87	360,000	104.4	270~330	7,950		2.7m*1.1m*2.35m	1.3m*1.1m*1.4m	1050
36HP		28.8	104.4	432,000	125.3	325~400	9,540		2.7m*1.1m*2.35m	1.3m*1.1m*1.5m	1200


AP.EBD Series

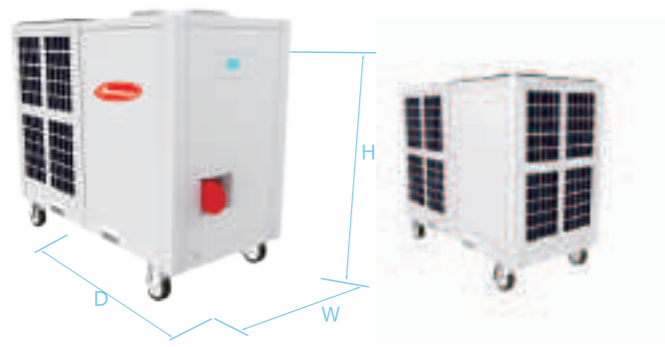

Technical Parameters

Model	Operating Voltage	Power Input (KW)	Cooling Capacity		Heating Capacity (KW)	Cooling Area (㎡)	Air Volume (CFM)	Refrigerant	Unit Dimension (D*W*H)	Weight (KG)
			KW	BTU						
10HP	220V~440V / 3N / 50Hz / 60Hz	8	29	120,000	34.8	90~110	2,650	R410a Eco-friendly	1.8m*0.85m*1.1m	460

Connection with Tents

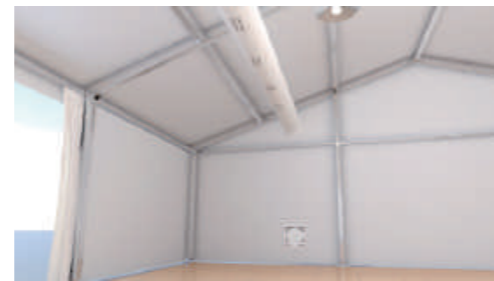





AP.YQBD Series



Technical Parameters

Model	Operating Voltage	Power Input (KW)	Cooling Capacity		Heating Capacity (KW)	Cooling Area (㎡)	Air Volume (CFM)	Refrigerant	Unit Dimension (D*W*H)	Weight (KG)
			KW	BTU						
5HP	220V~440V / 3N / 50Hz / 60Hz	4	14.5	60,000	17.4	45~55	1,325	R410a Eco-friendly	1.5m*1.0m*1.1m	320
7.5HP		6	21.75	90,000	26.1	68~85	1,988		1.7m*1.1m*1.3m	365
10HP		8	29	120,000	34.8	90~110	2,650		1.8m*1.1m*1.5m	450
12.5HP		10	36.25	150,000	43.5	110~140	3,313		1.9m*1.1m*1.6m	520

Connection with Tents

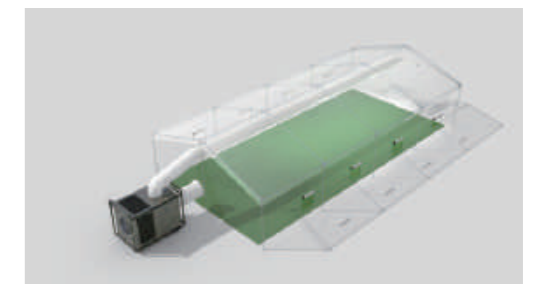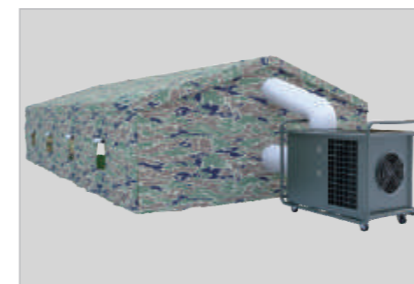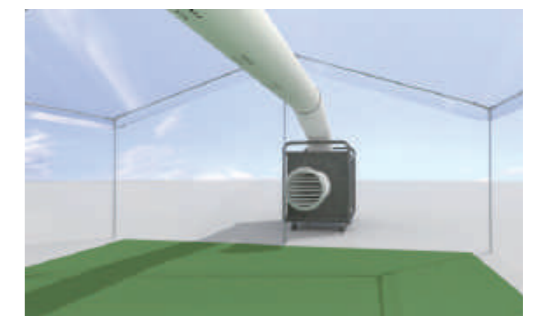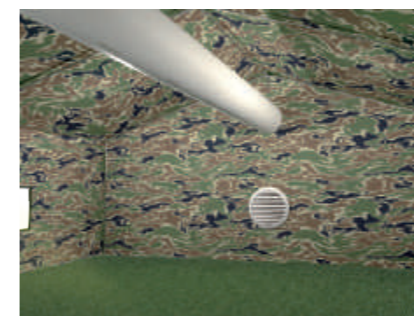

AP.QBD Series



Accessories

1. Plenum chamber box, Galvanized Metal Duct



2. Electricity box, Cable wires, Air Curtain, Fast plug



Technical Parameters

Model	Operating Voltage	Power Input (KW)	Cooling Capacity		Heating Capacity (KW)	Cooling Area (㎡)	Air Volume (CFM)	Refrigerant	Unit Dimension (D*W*H)	Weight (KG)
			KW	BTU						
5HP	220V~440V / 3N / 50Hz / 60Hz	4	14.5	60,000	17.4	45~55	1,325	R410a Eco-friendly	1.3m*0.75m*1.55m	320
7.5HP		6	21.75	90,000	26.1	68~85	1,988		1.4m*0.79m*1.8m	365
10HP		8	29	120,000	34.8	90~110	2,650		1.7m*1.0m*1.85m	450
12.5HP		10	36.25	150,000	43.5	110~140	3,313		1.8m*1.1m*2.1m	520